
## Lift and Transport Truck HTW 50/100 Standard Model

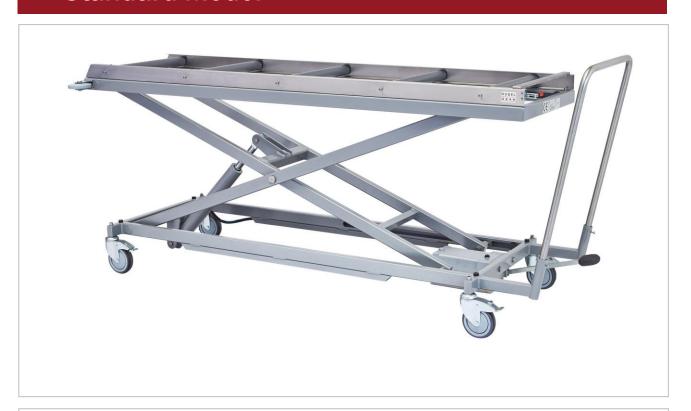

The lift and transport truck has a rugged, torsion-resistant frame structure and is made of powder coated steel (grey – RAL 9007). Additionally is has a smoothly running, integrated hydraulic unit for foot-actuated vertical adjustment for easy handling and 4 steerable solid rubber wheels, 2 of them lockable, 1 enabling locking as regards to the direction, d = 125 mm with special roller bearings, permanently lubricated and maintenance-free, which ensure an absolutely noiseless movement. The low deadweight permits straightforward shunting and operation of the lift and transport truck. A special valve ensures even lowering at various loads. A stainless steel roller track comprising 5 carrying rollers of corrosion-resistant material and plastic coating has been arranged on top of the truck. A holding device secures the body tray or coffin plate lying on it. The slide handle of the lift and transport truck can be removed. An anti-collision buffer is mounted to the front end.

### **Technical Data:**

Dimensions lowest Position W/D/H: 2150 x 750 x 320 mm Dimensions highest Position W/D/H: 2150 x 750 x 1650 mm

Carrying capacity: max. 250 kg
Dead weight: approx. 100 kg

Material: Steel

Colour: Light grey RAL 9007 (powder coated)

Type: HTW 50/100 Article No.: 050.010.010

Lift and Transport Truck HTW 50/100 - 350 kg

Material: Steel Article-No.: 050.010.012

Additional models see back page

KUGEL medical GmbH & Co. KG

Hermann-Köhl-Str. 2A


DE - 93049 Regensburg/Germany

Phone +49/941/20 86 48-0 Fax +49/941/20 86 48-29 www.KUGEL-medical.de





# Lift and Transport Truck HTW 51/100 Completely Made of Stainless Steel

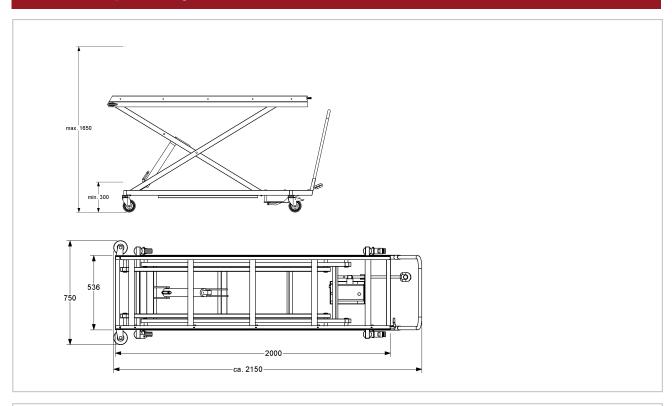

The lift- and transport truck has a rugged, torsion-resistant frame structure and is completely made of stainless steel (Material no. 1.4301 – ANSI 304). Additionally it has a smoothly running, integrated hydraulic unit for foot-actuated vertical adjustment for easy handling and 4 steerable solid rubber wheels, 2 of them lockable, 1 enabling locking as regards to the direction, d = 125 mm with special roller bearings, permanently lubricated and maintenance-free. The low deadweight permits straightforward shunting and operation of the lift and transport truck. A special valve ensures even lowering at various loads. A stainless steel roller track comprising 5 carrying rollers of corrosion-resistant material and plastic coating has been arranged on top of the truck. A holding device secures the body tray or coffin plate lying on it. The slide handle of the lift and transport truck can be removed. An anti-collision buffer is mounted to the front end.

### **Technical Data:**

Dimensions lowest Position W/D/H: 2150 x 750 x 320 mm Dimensions highest Position W/D/H: 2150 x 750 x 1650 mm

Carrying capacity: max. 250 kg
Dead weight: approx. 100 kg

Material: Stainless steel (Material No. 1.4301 – ANSI 304)

Type: HTW 51/100 Article No.: 050.090.010

#### Lift and Transport Truck HTW 51/100 - 350 kg

Material: Stainless steel Article-No.: 050.090.012

KUGEL medical GmbH & Co. KG Hermann-Köhl-Str. 2A

DE - 93049 Regensburg/Germany

Phone +49/941/20 86 48-0 Fax +49/941/20 86 48-29 www.KUGEL-medical.de



